

A Unique Application of Gasoline Particulate Filter Pressure Sensing Diagnostics (Do NOT enter this information. It will be pulled from participant tab in MyTechZone)

Affiliation (Do NOT enter this information. It will be pulled from participant tab in MyTechZone)

Abstract

Gasoline particulate filters (GPFs) are important aftertreatment components that enable gasoline direct injection (GDI) engines to meet EU6 and China6 particulate number (PN) emissions regulations for non-volatile particles > 23 nm in diameter. GPFs are rapidly becoming an integral part of the modern GDI aftertreatment system.

The Active Exhaust Tuning Valve (EXTUN) is a butterfly valve placed in the tailpipe of an exhaust system that can be electronically positioned to control exhaust noise levels (decibels) under various vehicle operating conditions. This device is positioned downstream of the GPF and variations in tuning valve position can impact exhaust backpressures making it difficult to monitor soot/ash accumulation or detect damage/removal of the GPF substrate.

The purpose of this work is to present a unique example of subsystem control and diagnostic architecture for an exhaust system combining GPF and EXTUN. In particular, the On-Board Diagnostics (OBD) controls required to detect a disconnected/plugged downstream hose when combining a differential pressure sensor and an electronically controlled exhaust tuning (EXTUN) valve in an exhaust system containing a GPF. The regulatory implications related to failing to detect a disconnected/plugged downstream hose are also discussed. Validation data from the control strategy under different operating conditions is reviewed.

Introduction

Internal combustion engines, in particular gasoline engines with direct injection fuel systems, generate fine particulate matter during engine operation that are subject to emission regulation. Gasoline particulate filters (GPFs) are utilized in the engine exhaust system to trap this particulate matter before it is released to the atmosphere. With a view toward meeting increasingly stringent EU7 emission requirements and monitoring, GPFs are rapidly becoming a ubiquitous part of new GDI aftertreatment systems in Europe and China and are even expected to gain a greater share in the PFI segment.

Similarly, the particulate matter regulatory requirements in the US continue to tighten. The Environmental Protection Agency (EPA) U.S. Tier 3 and California Air Resources Board (CARB) LEVIII standards mandate tailpipe particulate matter (PM) limits of 3 mg/mi, down from the current 10 mg/mi beginning in 2023 and PM1 (1 mg/mi) limits will follow starting 2026.

Since 1991, regulatory agencies in the US and European Union (EU) have been imposing specific regulations on automotive companies that require the integration of on-board diagnostics (OBD) monitoring for the detection and reporting of emission control malfunctions. OBD regulations generally require original equipment manufacturers (OEMs) to assure that the health of emission control components is maintained and functional throughout the life of the vehicle. GPF emission control systems are no different and require unique diagnostic controls to meet these regulatory requirements.

Under some circumstances the GPF substrate can become damaged and unable to trap particulate matter. In other circumstances, the filter may be missing or removed from the exhaust system. In order to

detect a degraded or missing GPF, one or more exhaust pressure sensors are used for diagnosis. These sensors are normally connected and measure pressure upstream and/or downstream of the GPF.

Generally, three types of exhaust pressure sensors have been developed for use in GPF control systems:

- **Single Port Gauge Sensor** – Measures and outputs pressure with respect to barometric pressure at the location connected to the exhaust. For example, a connection to the exhaust upstream of the GPF would measure pre-GPF gauge pressure.
- **Dual Port Gauge Sensor** – This is effectively two single port gauge sensors in the same housing. The difference between a Dual Port Gauge Sensor and a Dual Port Differential Sensor is that the dual port gauge sensor outputs two **independent** pressures and the differential pressure is calculated external (in the PCM), rather than internal, to the device.
- **Dual Port Differential Sensor** – Measures, internally calculates and outputs pressure differential between two locations in the exhaust. For example, connections upstream and downstream of the GPF would output the pressure drop across the GPF.

This paper is specifically focused on **diagnostic interactions with dual port differential pressure sensors**.

One example approach outlined by Nieuwstadt in U.S. Patent No. 6,947,831 et al. [3] discloses the use of a differential pressure sensor to determine the state of a particulate filter for regeneration purposes. The method illustrates monitoring with a differential pressure across the filter and compares the pressure reading against a threshold for the purposes of diagnosing a degraded filter. A comparison of expected pressure response versus actual pressure reading **based on exhaust** flow variation is used to indicate particulate filter degradation or induce regeneration of the filter accordingly.

However, authors herein have recognized potential issues with the above approach. During normal vehicle operating conditions, the downstream and/or upstream pressure sensor connections might become disconnected, resulting in inaccurate pressure readings and directly affecting the GPF controls. The on-board diagnostics control system must detect GPF component fault conditions, such as a differential pressure sensor with a downstream hose disconnected, in order to accurately monitor the health status of the GPF and/or detect when the GPF is damaged or missing. Under some circumstances, in the presence of an EXTUN valve, the method outlined is unable to detect a disconnected downstream hose or diagnose a missing/damaged particulate filter.

This study aims to highlight a novel control and diagnostic method used to diagnose a disconnected downstream hose on a dual port differential pressure sensor in a GPF exhaust system utilizing an EXTUN valve.

EXPERIMENTAL

Vehicles

For investigation purposes a 2018 Ford Mustang equipped with GPF was selected for testing. The vehicle has a production intent 5.0L V8 producing 460 hp at 6500 RPM with dual exhaust fitted with actively controlled exhaust tuning valves.

System Layout

This vehicle used a production exhaust system consisting of three-way catalyst (TWC) and GPF in the light-off position on both banks. The close-coupled, round TWCs were 4.66 x 2.93" (50 in³) and contained Pd and Rh. The filter substrate was a cordierite wall-flow substrate with 1.0 g/in³ of three-way catalyst washcoat containing Pd and Rh. The porosity of the filter was approximately 65% with a mean pore size of 22 µm. The GPF had a diameter of 5.66", a length of 6", 2.5 L total geometric volume, cell density of 300 cells per in², and 305 µm (12 mil) walls.

Exhaust System Layout with GPF + Differential PFP + EXTUN Valve

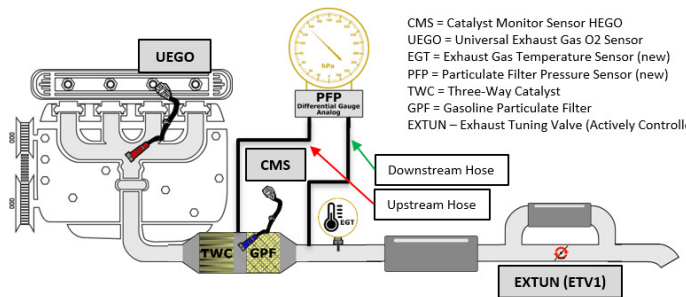


Figure 1- General exhaust layout 5.0L Mustang test vehicle with differential Particulate Filter Pressure (PFP) sensor configuration and active exhaust tuning (EXTUN) valve.

As shown in Figure 1, the universal exhaust gas O₂ sensor (UEGO) is used in an upstream position, relative to the catalyst and determines Air/Fuel (A/F) ratio in the exhaust. The catalyst monitor sensor (CMS) is used in a downstream location (either partial volume or full volume location). **The CMS is used for both catalyst efficiency monitoring and outer loop fuel control feedback.** A differential pressure (dP) sensor or (PFP) measures the pressure drop across the GPF.

It should be noted that **for the purposes of the discussion in this paper**, the PFP (dP) sensor, as illustrated in Figure 1, performs the calculation for pressure drop (inlet pressure – outlet pressure) across the GPF internal to the sensor and can only feedback **differential pressure**. This limitation will be important in the upcoming discussion of diagnostic methods.

Particulate Filter Operating Principles

The general construction and purpose of gasoline (GPF) and diesel (DPF) particulate filters are identical – both capture and regenerate soot. Generally, GPFs and DPFs both force exhaust mass to flow through filter media by capping the entrance and exit of alternating flow capillaries in the substrate. Both GPF and DPF substrates can be washcoated to provide some of the oxidation and reduction characteristics of a TWC catalyst (washcoating can impact both backpressure and filtration efficiency).

However, the operating strategy for maintenance and control differs significantly between GPFs and DPFs. GPFs normally operate at stoichiometric exhaust gas conditions and maintain GPF substrate temperatures which are sufficiently warm, under many operating conditions, to promote soot regeneration. On the other hand, DPFs normally operate in an environment with excess O₂ and at temperatures which are consistently below those required for soot regeneration.

Additionally, diesel vehicles produce considerably more soot during combustion, often requiring unique soot regeneration modes to maintain particulate filter health and keep exhaust backpressure low.

Alternatively, GDI vehicle produce much lower levels of soot during combustion at warm-up state[23]. GDI engines are able to maintain optimal particulate filter performance without unique regeneration modes due to higher exhaust operating temperature and periodic exhaust stream oxygenation – passive regeneration.

The term “passive regeneration” is intended to mean particulate filter soot oxidation that occurs without activating any unique regeneration control action. Passive regeneration occurs when engine operating conditions produce exhaust temperatures greater than 500°C in the presence of oxygen facilitating the regeneration of the trapped soot in the particulate filter. Specifically, this type of regeneration normally occurs during a deceleration event when fuel is shut off to the cylinders to promote fuel economy (DFSO, decel fuel shutoff). During this time the particulate filter is sufficiently hot and the DFSD event produces substantial excess oxygen in the exhaust flow stream for soot regeneration.

Some captured particulate matter (ash) is unable to be regenerated and gets permanently deposited onto the substrate wall, never leaving the pores. Moderate ash accumulation is expected over the life of a particulate filter and is even beneficial to filtration efficiency. Proper particulate filter monitoring and maintenance is essential to avoiding a build-up of ash or unburned soot which can result in engine or substrate damage due to excessive exhaust backpressure or thermal damage.

Exhaust Tuning Valve Operating Principle

Figure 2 shows the cold end of the dual exhaust system which is comprised of tailpipe, exhaust hangers and mufflers with two exhaust ducts. The exhaust tuning valve controls exhaust flow through only one tailpipe duct and is positioned after the muffler as illustrated. The butterfly valve is controlled by a stepper motor via pulse width modulation (PWM) which communicates valve position as well as electrical, mechanical and functional fault states. At ‘Valve Open’ position, the exhaust flow bypasses the muffler and has a direct path to atmosphere. At ‘Valve Close’, the exhaust gases are redirected and are forced through the muffler before exiting, thereby attenuating the engine exhaust decibel volume.

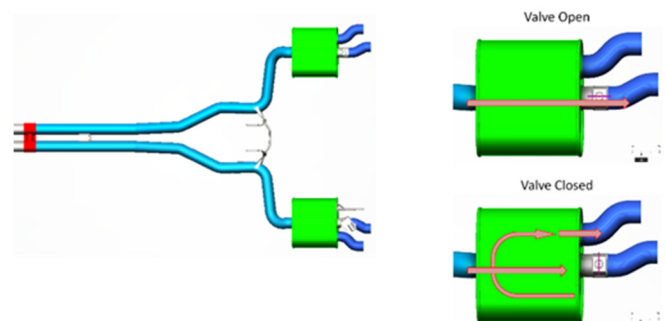


Figure 2 - Exhaust flow control with an Active Exhaust Tuning (EXTUN) Valve

Drive Cycle and Real-World Verification and Validation

The downstream hose off detection method outlined was subjected to all standard regulatory drive cycles (WLTP, RDE, FTP, US06, etc.) to assure completion frequency and robust detection capability. Additionally, the diagnostic was subjected to OBD robustness validation testing and challenge drives consisting of thousands of miles of both faulted and unfaulted real-world driving conditions.

Minor thresholding and entry condition modifications were made to the monitor prior to final implementation but all validation data showed that the downstream hose disconnected monitor was robust and able to reject noise factors when subjected to real-world operation.

Robustness

In this section we will analyze the robustness of the downstream hose disconnected diagnostic. The relevant noise factors for this analysis are:

- 1) GPF pressure sensor tolerance: an additive noise with a 3*sigma level of 1.15 hPa
- 2) Exhaust flow model: a multiplicative noise with a 3*sigma level of 5%
- 3) Drive cycle: Selected from a series of drives, for both banks of the 5.0L V8 engine on the Ford Mustang.

The exhaust flow is a noise factor because it is the input to the threshold for the monitor metric; at higher exhaust flows we expect a greater pressure difference when the hose is disconnected. It is estimated from the air charge model, which is based on volumetric efficiency.

In order to compare monitor results at different flow regimes we use the distance from the pressure drop to the fault threshold as the monitor metric rather than the measured pressure drop directly. When the downstream hose is disconnected, we expect a positive distance from the threshold. When the downstream hose is connected, we expect a negative distance from the threshold.

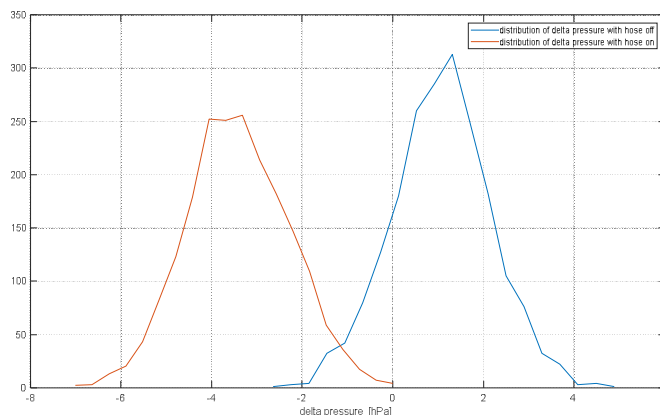


Figure 10 – Histogram of the monitor metric (pressure difference in hPa) for a set of drive cycles with hose off and hose on.

The results of a Monte Carlo simulation with the above noise factors, over 40,000 samples are shown in Figure 10. We can define the

separation between the intact and failed systems as the difference in means over the geometric sum of the standard deviations.

$$S = \frac{\mu_{hose\ off} - \mu_{hose\ on}}{\sqrt{0.5(\sigma_{hose\ off}^2 + \sigma_{hose\ on}^2)}}$$

And find the value $S = 4.05$ for this analysis.

Summary/Conclusions

This study focused on using an active exhaust tuning valve to diagnose a disconnected downstream hose on a differential pressure sensor using a 5.0L Ford Mustang as a test vehicle, the following conclusions emerged.

- A novel method that utilizes an exhaust tuning valve to conduct an intrusive differential pressure sensor downstream hose disconnected diagnostic with a GPF was developed.
- The differential pressure sensor downstream hose disconnected diagnostic method proved robust and showed considerable separation between faulted and non-faulted conditions.
- The diagnostic method developed allows the manufacturer to meet regulatory requirements for the detection of a missing downstream hose off and robustly diagnose a missing or damaged GPF substrate.

References

1. "Review of Vehicle Engine Efficiency and Emissions", SAE Technical Paper 2020-01-0352, [doi:10.4271/2020-01-0352](https://doi.org/10.4271/2020-01-0352), Ameya Joshi
2. Giechaskiel, B., Joshi, A., Ntziachristos, L., and Dilara, P., "European Regulatory Framework and Particulate Matter Emissions of Gasoline Light-Duty Vehicles: A Review," Catalysts 9:586, 2019, [doi:10.3390/catal9070586](https://doi.org/10.3390/catal9070586).
3. "Pressure sensor diagnosis via a computer", U.S. Patent US6947831B2
4. Lambert, C., Bumbaroska, M., Dobson, D., Hangas, J. et al., "Analysis of High Mileage Gasoline Exhaust Particle Filters," SAE Int. J. Engines 9(2):2016, [doi:10.4271/2016-01-0941](https://doi.org/10.4271/2016-01-0941)
5. Van Nieuwstadt, M. and Ulrey, J., "Control Strategies for Gasoline Particulate Filters", SAE Technical Paper 2017-01-0931, 2017, [doi:10.4271/2017-01-0931](https://doi.org/10.4271/2017-01-0931).
6. Richter, J., Klingmann, R., Spiess, S., and Wong, K. "Application of Catalyzed Gasoline Particulate Filters to GDI Vehicles", SAE Int. J. Engines 5(3):1361–1370, 2012, [doi:10.4271/2012-01-1244](https://doi.org/10.4271/2012-01-1244).
7. Chan, T., Meloche, E., Kubsh, J., Rosenblatt, D. et al., "Evaluation of a Gasoline Particulate Filter to Reduce Particle Emissions from a Gasoline Direct Injection Vehicle", SAE Int. J. Fuels Lubr. 5(3):1277-1290, 2012, [doi:10.4271/2012-01-1727](https://doi.org/10.4271/2012-01-1727).
8. Sappok, A., Wang, Y., Wang, R., Kamp, C. et al., "Theoretical and Experimental Analysis of Ash Accumulation and Mobility in Ceramic Exhaust Particulate Filters and Potential for Improved Ash Management", SAE Int. J. Fuels Lubr. 7(2):511-524, 2014, [doi:10.4271/2014-01-1517](https://doi.org/10.4271/2014-01-1517).
9. Sumanth Dadam, Sanyam Sharma and Jentz R., *Method for Variable Position Exhaust Tuning Valve Diagnostics*, U.S. Patent number: 10844762
10. Dadam, S., Jentz, R., Ienzen, T., and Meissner, H., "Diagnostic Evaluation of Exhaust Gas Recirculation (EGR) System on Gasoline Electric Hybrid Vehicle," SAE Technical Paper 2020-01-0902, 2020, <https://doi.org/10.4271/2020-01-0902>.

11. Michiel J Van Nieuwstadt, Allen Lehmen, Douglas Raymond Martin, John Eric Rollinger, Sumanth Dadam, Rohit Bhat, *Gasoline particulate filter diagnostics*, U.S. Patent number: 10323562
12. Robert Jentz, Tyler Lenzen, Sumanth Dadam, Herbert Meissner, Kent Hancock, *Method and system for exhaust gas recirculation system diagnostics*, U.S. Patent number: 10632988
13. Robert Roy Jentz, Sanyam Sharma, Sumanth Dadam, *Heat exchanger for exhaust tuning systems*, U.S. Patent number: 10436087
14. Van Nieuwstadt, M., Shah, A., Serban, E., and Martin, D., “Regeneration Strategies for Gasoline Particulate Filters”, SAE Technical Paper 2019-01-0969, 2019, [doi:10.4271/2019-01-0969](https://doi.org/10.4271/2019-01-0969).
15. Sumanth Dadam, *GPF Downstream Hose EGHR Diagnostic on Hybrids*, U.S. Patent number: 10928275
16. Liu, X., Szente, J., Pakko, J., Lambert, C. et al., “Using Artificial Ash to Improve GPF Performance at Zero Mileage”, SAE Technical Paper 2019-01-0974, 2019, <https://doi.org/10.4271/2019-01-0974>.
17. ZHU, D., PRITCHARD, E., DADAM, S.R. et al. Optimization of rule-based energy management strategies for hybrid vehicles using dynamic programming. Combustion Engines. 2021. <https://doi.org/10.19206/CE-131967>
18. Dadam, S., Ravi, V., Jentz, R., Kumar, V. et al., "Assessment of Exhaust Actuator Control at Low Ambient Temperature Conditions," SAE Technical Paper 2021-01-0681, 2021, <https://doi.org/10.4271/2021-01-0681>.
19. Snyder, K. and Ku, J., "Plug-in Hybrid Electric Vehicle Reengineering of a Conventional Sedan for EcoCAR2," SAE Technical Paper 2015-01-1235, 2015, <https://doi.org/10.4271/2015-01-1235>
20. Snyder, K. and Ku, J., "Advancement and Validation of a Plug-In Hybrid Electric Vehicle Plant Model," SAE Technical Paper 2016-01-1247, 2016, <https://doi.org/10.4271/2016-01-1247>.
21. Ravi; Vinod Kumar , Dadam; Sumanth Reddy , *Methods and systems for an active exhaust valve* U.S. Patent number: 11,002,166
22. Ravi; Vinod Kumar , Dadam; Sumanth ,Jentz; Robert Roy, *Methods and system for diagnosing active exhaust valves based on temperature and thermal image data* U.S. Patent number: 11,015,511
23. Vedula, R., Men, Y., Atis, C., Stuecken, T. et al., "Soot Observations and Exhaust Soot Comparisons from Ethanol-Blended and Methanol-Blended Gasoline Combustion in a Direct-Injected Engine," *SAE Int. J. Fuels Lubr.* 11(2):163-180, 2018, <https://doi.org/10.4271/04-11-02-0008>
24. Dadam, S.R., Zhu, D., Kumar, V., Ravi, V. et al., “Detection Method for Cybersecurity Attack on Connected Vehicles,” SAE Technical Paper 2021-01-1249, 2021, <https://doi.org/10.4271/2021-01-1249>.
25. Kumar, V., Zhu, D., and Dadam, S.R., “Intelligent Auxiliary Battery Control-A Connected Approach,” SAE Technical Paper 2021-01-1248, 2021, <https://doi.org/10.4271/2021-01-1248>.

Contact Information

Definitions/Abbreviations

dP – Differential Pressure Sensor	DPF – Diesel particulate filter
GPF – Gasoline Particulate Filter	GDI – Gasoline direct injection
UEGO – Universal exhaust gas O2 sensor	CMS – Catalyst Monitor Sensor